



Hydro Mobile Swivel Bridge

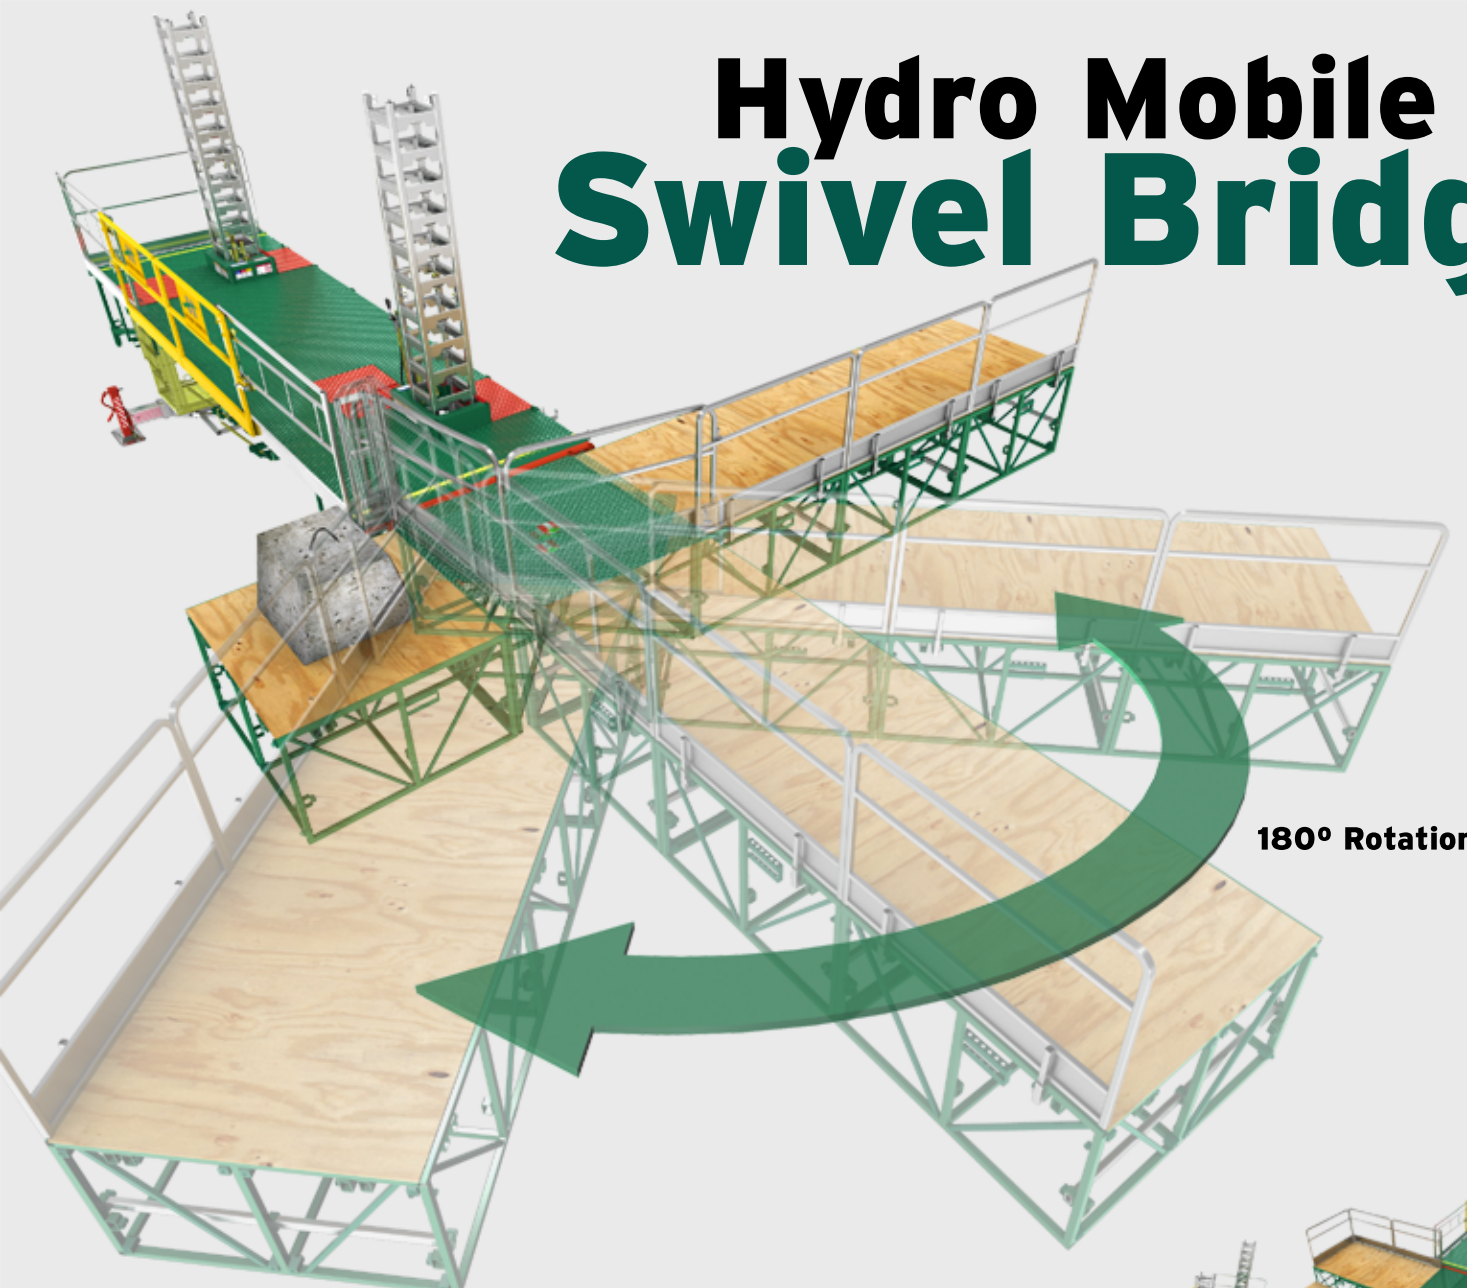


180° Rotation

M2 bridge adapter used to install swivel and F-P-E series bridges

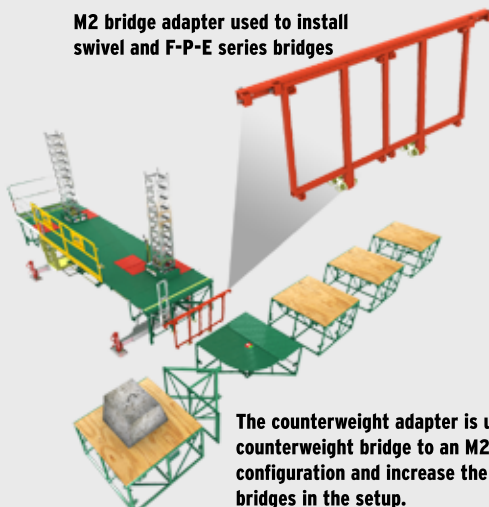

The counterweight adapter is used to attach a counterweight bridge to an M2 swivel bridge in a 90° front configuration and increase the capacity of the cantilever bridges in the setup.

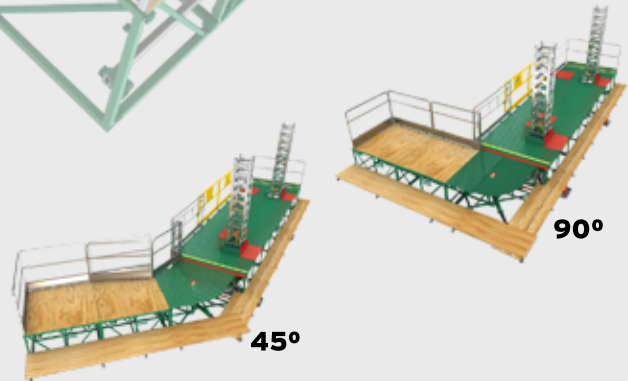

45°

90°

The new outrigger support system helps create a plank support structure for the M2 swivel bridge used in a back configuration.



HYDRO MOBILE MAST-CLIMBING WORK PLATFORMS

For more information, visit our website at: www.hydro-mobile.com



ELEVATING
EFFICIENCY