


Hydro Mobile Swivel Bridge



180° Rotation

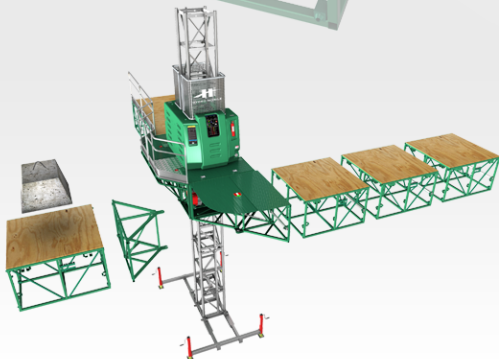

The counterweight adapter is used to attach a counterweight bridge to an F2 swivel bridge in a 90° front configuration and increase the capacity of the cantilever bridges in the setup.



The new outrigger support system helps create a plank support structure for the F2 swivel bridge used in a back configuration.



90°



45°

HYDRO MOBILE MAST-CLIMBING WORK PLATFORMS

For more information, visit our website at: www.hydro-mobile.com



ELEVATING
EFFICIENCY